
DOUCET

GS2 - GLUE CONVEYOR

The Glue Conveyor model GS2 features a mild angle iron infeed conveyor, a stainless steel glue roller and a stainless steel angle iron outfeed conveyor.





GS2 SPREADER ROLLER

WARRANTY 1 YEAR


CHARACTERISTICS & OPERATION

FEATURES AND SPECIFICATIONS


- Standard size: 13" x 16';
- Motor: ¾ HP, 3 Phase, 220, 440 or 600 Volts;
- Material Feed Speed: 60 feet per minute;
- Reservoir: stainless steel with lid, can be removed for cleaning and maintenance;
- The infeed and outfeed conveyors are both 8' long.

OPTIONS & SPECIFICATIONS

- Conveyor length extension: in two feet increments;
- 20" or 30" conveyor width;
- Non-motorized pressure roller;
- Overhead return: non-motorized conveyor;
- Electric glue pump;
- Top pressure roller.

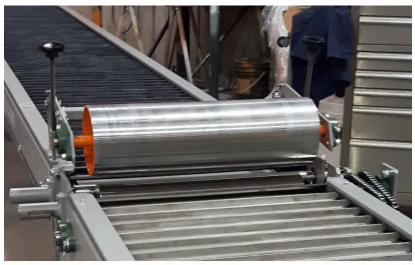

PRESSURE ROLLER, NON-MOTORIZED

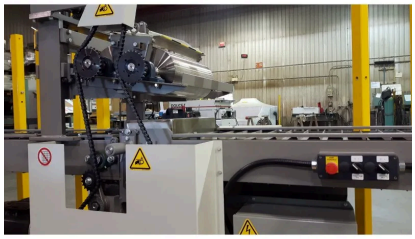

GLUE CONVEYOR WITH DUAL GLUE APPLICATOR

DOUCET
P. 1-866-673-8876
P. 1-819-367-2633
E. info@doucetinc.com
doucetinc.com

DISCOVER OUR RESOURCE CENTER

- Articles
- Tutorials
- Videos
- Technical Support
- Tools