
DOUCET


ESB SEQUENCER FOR EDGEBANDERS

The Panel Sequencer Model ESB increases the productivity of Edgebanders, Shapers-Sanders, Tenoners, etc., right from the start.



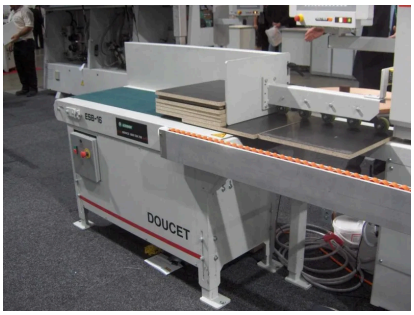

ESB SEQUENCER FOR EDGEBANDERS PRESSURE WHEELS OPTION

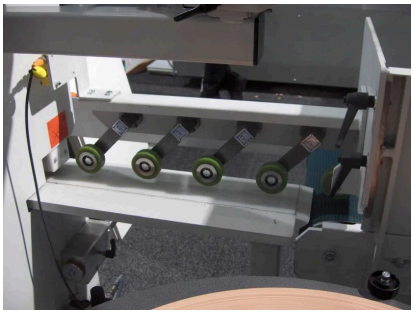

ESB-16 WITH INFEED PRESSURE WHEELS OPTION

WARRANTY 1 YEAR

CHARACTERISTICS & OPERATION

- The ESB allows the operator to stage several panels in its bottom feed magazine. Panels are released automatically as soon as the preceding one clears the "no feed zone" on your Edgebander, or fed end-to-end on your Shaper-Sander.
    - Its feed sequence is automatically controlled by a photocell into a PLC;
    - Its feed speed is adjustable by a variable speed drive;
    - Its feed hopper offers a reserve capacity up to 12" thick or up to a maximum of 150 lb;
    - Sequencing of panels fed lengthwise is fully automaticThe ESB requires a 110 v.a.c. 15 amp. service.

OPTIONS & SPECIFICATIONS

The ESB Panel Sequencer is available in two models:

- **ESB-12:** features a 12" wide by 36" long feed belt. It is suitable for feeding panels ranging in size from 4" by 10" to 18" by 54" at up to 100 feet per minute.
- **ESB-16:** features a 16" wide by 54" long feed belt. It is suitable for feeding panels ranging in size from 4" by 10" to 24" by 84" at up to 100 feet per minute.

Sequencing of panels fed width-wise or of panels larger than those described above requires the assistance of an operator.

The ESB is available in right or left-hand feed configurations.

DOUCET
P. 1-866-673-8876
P. 1-819-367-2633
E. info@doucetinc.com
doucetinc.com

DISCOVER OUR RESOURCE CENTER

- Articles
- Tutorials
- Videos
- Technical Support
- Tools